
Glass Tech Entrance Systems Ltd. **PF100DC SERIES** GLASS DOOR CLOSER

INTEGRATED PATCH DOOR CLOSER

PF100DC





- » Non-handed
- » Single or double acting
- » Integrated in to surface-mounted lower patch fitting
- » Hold open model available (DCHO)
- » 150° door opening
- » 90° door opening for hold open model
- » For frame-less tempered glass doors between $\frac{5}{16}$ " (8 mm) to $\frac{1}{2}$ " (13 mm) thick
- » High performance narrow design
- » Adjustable closing and latching speed control
- » Integrated door position adjustment
- » Can operate in temperatures between -4°F (-20°C) to 122°F (+50°C)
- » Additional patch fittings sold separately



Typical parts required for frame-less glass door installation (as shown)

DOOR CLOSER

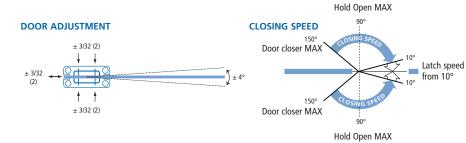



SELECTION GUIDE

MODEL NUMBER	MAXIMUM DOOR THICKNESS	MAXIMUM DOOR WIDTH	MAXIMUM DOOR WEIGHT	BACKCHECK	HOLD OPEN	FINISH
PF100DC	1/2 (13)	39 (1000)	220 lbs (100 kg)	YES	NO	629, 630
PF100DCHO					YES (90°)	